

WILLIAM GRAY

MRWILLIAMGRAY.COM @MRWILLIAMGRAY BY MEYER DAVIS



PRODUCT: Pilot 4

COLLECTION: PILOT

MANUFACTURER: RICH BRILLIANT WILLING

CURATED BY:
2020, N.Y.C.

William Gray

WG

©2020 WILLIAM GRAY INC.

Pilot 4

DESCRIPTION

Inspired by organic forms, as well as the elegant curves of a luxury aircraft, Pilot features a rounded, shell-like fiberglass shade. Pilot 4 is both playful and compatible with a wide variety of design styles. Based on end use, this fixture can expand in any direction over a range of table sizes and settings. The range of finishes allows this pendant to blend in or stand out.

DIMENSIONS & WEIGHT

Arm Length Options
6, 12 and 24 in

Stem Height Options
4, 8, 12, 18, 24, 36, 42 and 60 in

XX lb / XX kg

SPECIFICATIONS

36W power consumption
2200 lumens delivered

Lamping

4 x 9W LED
710 lumen source
min 80 CRI

LED Lifespan

50k hour


Available in 110-277V, 120V, or 220/240V input voltage
2200K, 2700K, 3000K or 3500K color temperature
Portfolio Dimming

MATERIAL

Steel, Aluminum Modules, Fiberglass Shades

FINISH

a. Matte White, b. Quartzite, c. Glacier, d. White Hybrid, e. Matte Black, f. Breccia, g. Glimmer, h. Blue Hammertone, i. Brown Gold Hammertone, j. Putty, k. Mottled Brass, l. Satin Nickel, m. Polished Chrome, n. Polished Copper, o. Warm Bronze, p. Polished Black Nickel

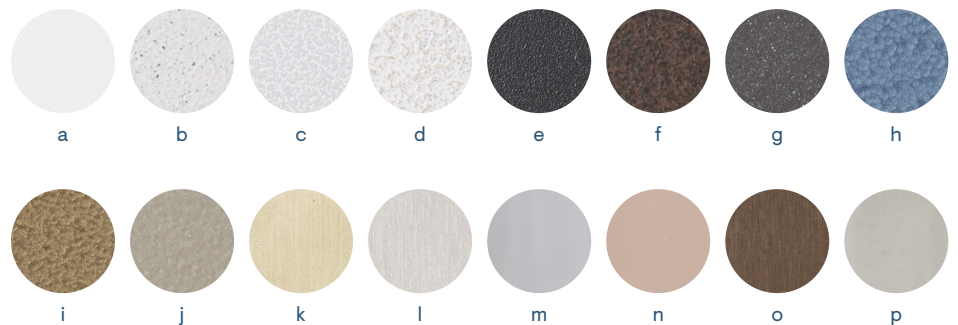

Pilot Specification Logic

Product ID specification logic

PT

Model	Variant	Finish	CCT	Input	Control	Power
-------	---------	--------	-----	-------	---------	-------

Model

Pilot	PT
-------	----

Variant (reference variant drawings)

2 lamp head	2__
3 lamp head	3__
4 lamp head	4__
6 lamp head	5__
8 lamp head	6__
16 lamp head	16__

Primary Finish (reference finish library)

powder coating	PC__
plated finish	PF__
custom finish	PCXX/PFXX

Color Temp

2200K (candlelight) ('-TR' control only)	22
222700K (warm white)	27
3000K (soft white)	30
3500K (neutral white)	35

Input Voltage

110-120V	120
220-240V (only with Flex "-TM" control)	220
110-277V*	277

*Upon request. Compatible with Performance "-10" and "-DL" control.

Control

Standard TRIAC forward-phase (10-100% dimming)	TR
Flex 0-10V analog* (1-100% dimming)	TM
Flex TRIAC forward-phase* (1-100% dimming)	TM
Flex ELV reverse-phase* (1-100% dimming)	TM
Performance 0-10V analog* (0.1-100% dimming)	10
Performance DALI digital* (0.1-100% dimming)	DL

*Requires external power supply


Power / external power supply	DEX
-------------------------------	-----

IP Rating / IP 65	IP65
-------------------	------

Power Supply Enclosure

Enclosure standard with every order. UL listed for cabinet and surface mount use.
11 × 2 × 4 in 286 × 48 × 95 mm

Pilot 4

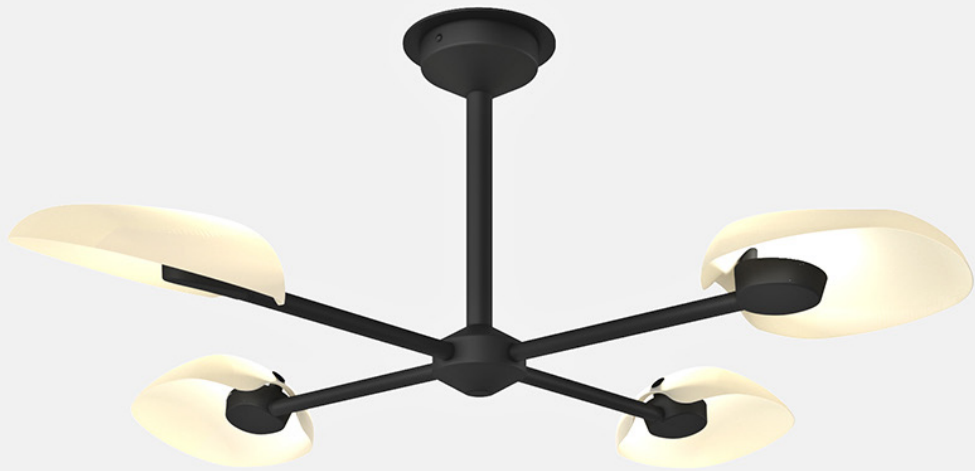

Pilot 4




Pilot 4




Pilot 4


Plan Elevation

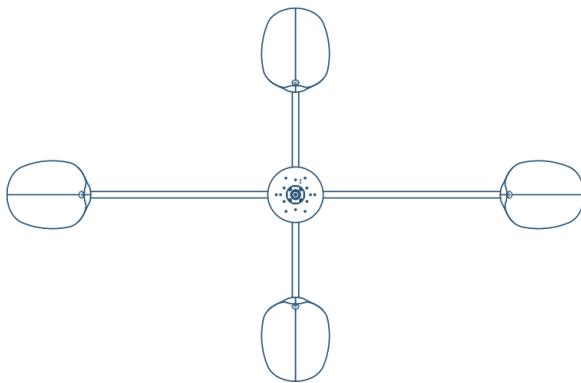

Plan Elevation



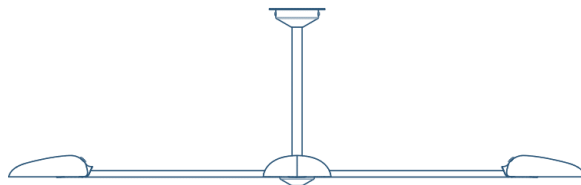


Plan Elevation

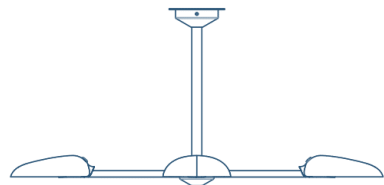

Pilot 4

Arm Length

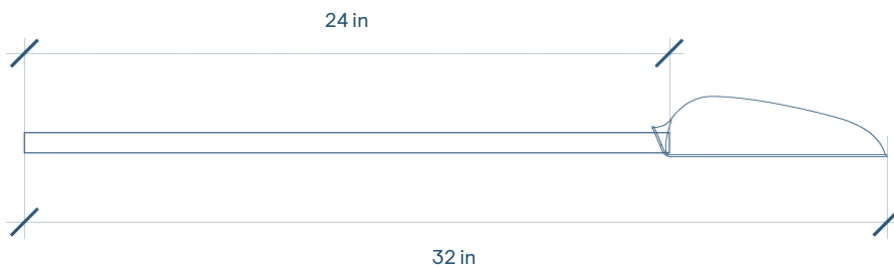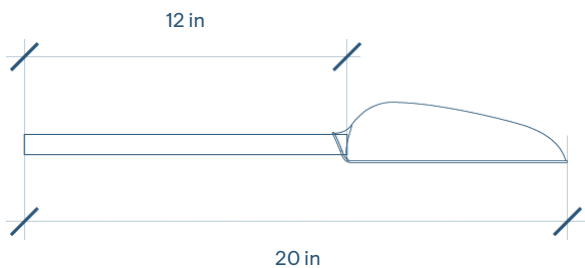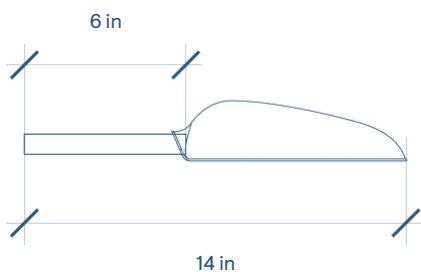

Pilot 4

