


WILLIAM GRAY

MRWILLIAMGRAY.COM @MRWILLIAMGRAY BY MEYER DAVIS

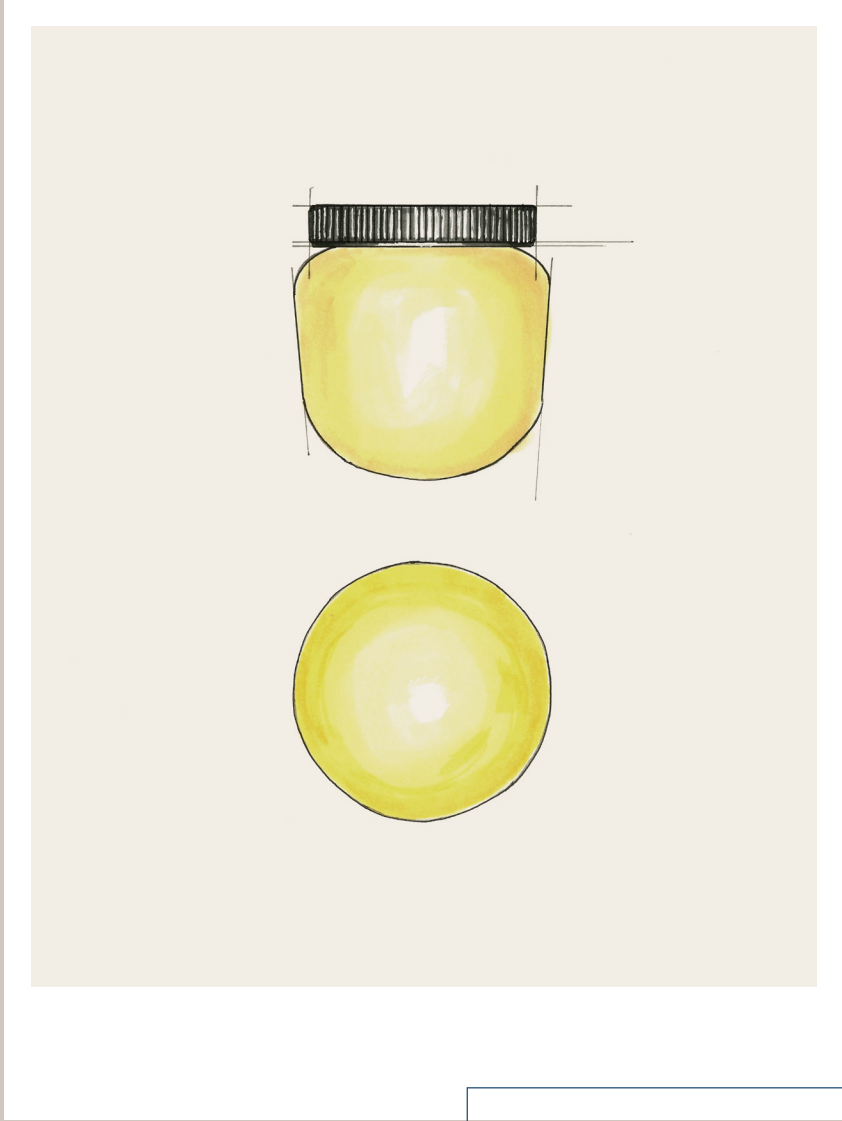

PRODUCT: Hoist Bare Large

COLLECTION: HOIST

MANUFACTURER: RICH BRILLIANT WILLING

CURATED BY:
2020, N.Y.C.

William Gray

WG

©2020 WILLIAM GRAY INC.

Hoist Bare Large

DESCRIPTION

A larger play on a simple globe fixture, this piece highlights the modern form of its cast glass diffuser. Use one for subtle illumination, or create a graphic effect when used en masse on the wall or ceiling. Equally suited for indoor and outdoor use - as a sconce or flushmount - and available in custom powdercoat options.

DIMENSIONS & WEIGHT

Ø 5.75 x D 7 in / Ø 150 x D 180 mm
1.8 lb / 0.8 kg

SPECIFICATIONS

8.5W power consumption
655 lumens delivered

Lamping

1 x 8.5W LED
700 lumen source
min 80 CRI

LED Lifespan

50k hour


Available in 110-277V, 120V, or 220/240V input voltage
2200K, 2700K, 3000K or 3500K color temperature
Portfolio Dimming

MATERIAL

Cast glass diffuser, aluminum module

FINISH

a. Cream White
b. Black
c. Blue
d. Vermilion

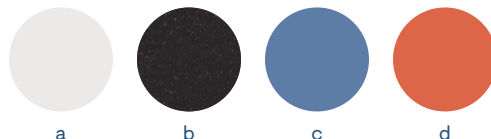

Hoist Specification Logic

Product ID specification logic

Model Variant Finish CCT Input Control Power IP

Model

Hoist	H
Hoist sconce	HS
Hoist pendant	HP

Variant

21" shade large diffuser	21B
14" shade large diffuser	14B
8" shade small diffuser	08A
no shade large diffuser	B
no shade small diffuser	A

Finish

Cream White	PC 24
Matte Black	PC30
Blue Gloss	PC36
Vermilion	PC42
custom powder coating	PCXX
custom plated finish	PFX

Color Temp

2200K (candlelight) ('-TR' control only)	22
2700K (warm white)	27
3000K (soft white) ('-TM' control only)	30
3500K (neutral white) ('-TM' control only)	35

Input Voltage

110-120V	120
220-240V (only with Flex "-TM" control)	220
110-277V*	277

*Upon request. Compatible with Performance "-10" and "-DL" control.

Control

Standard TRIAC forward-phase (10-100% dimming)	TR
Flex 0-10V analog* (1-100% dimming)	TM
Flex TRIAC forward-phase* (1-100% dimming)	TM
Flex ELV reverse-phase* (1-100% dimming)	TM
Performance 0-10V analog* (0.1-100% dimming)	10
Performance DALI digital* (0.1-100% dimming)	DL

*Requires external power supply

Power / external power supply DEX

IP Rating / IP 65 IP65

Pendant Swag Kit

Optional swag kit allows for installation without overhead junction box.
SKU: HP-2-PX__


Plug in Cord

192 in / 4877 mm standard cord length available in white. Custom lengths available upon request.

Canopy


5 in / 127 mm canopy matched to shade finish comes standard with every order.

Hoist Bare Large

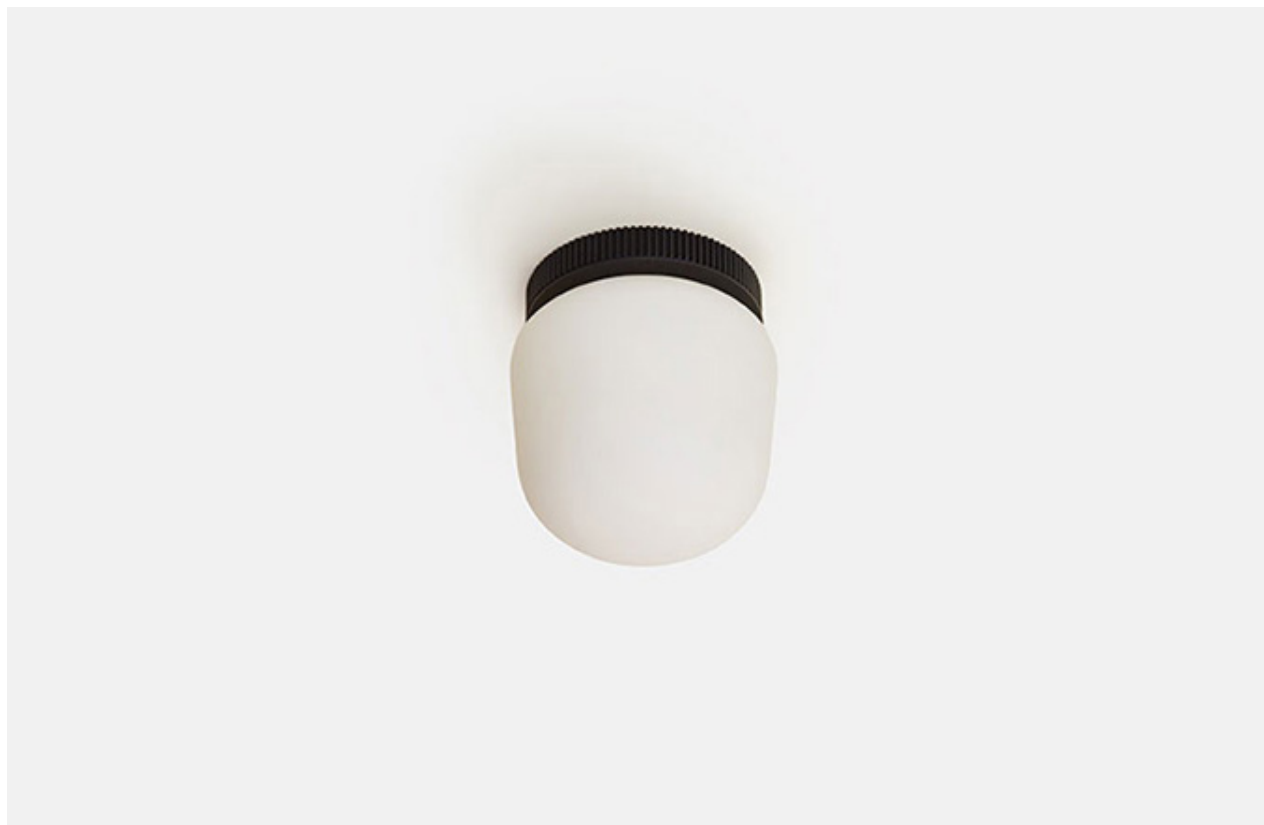


Hoist Bare Large

Front Elevation

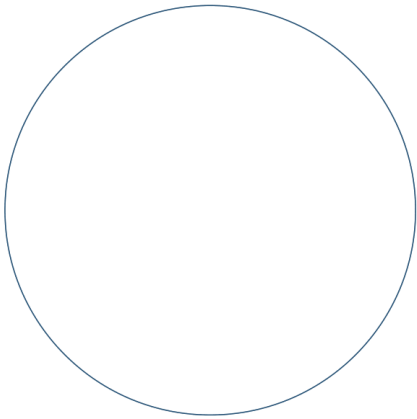

Ø 5.75 in

Side Elevation

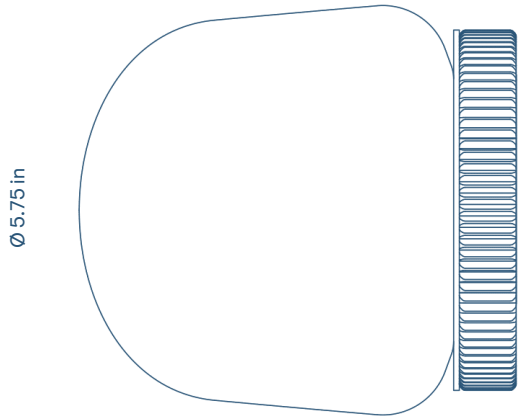

Ø 5.75 in

D 7 in