


WILLIAM GRAY

MRWILLIAMGRAY.COM @MRWILLIAMGRAY BY MEYER DAVIS

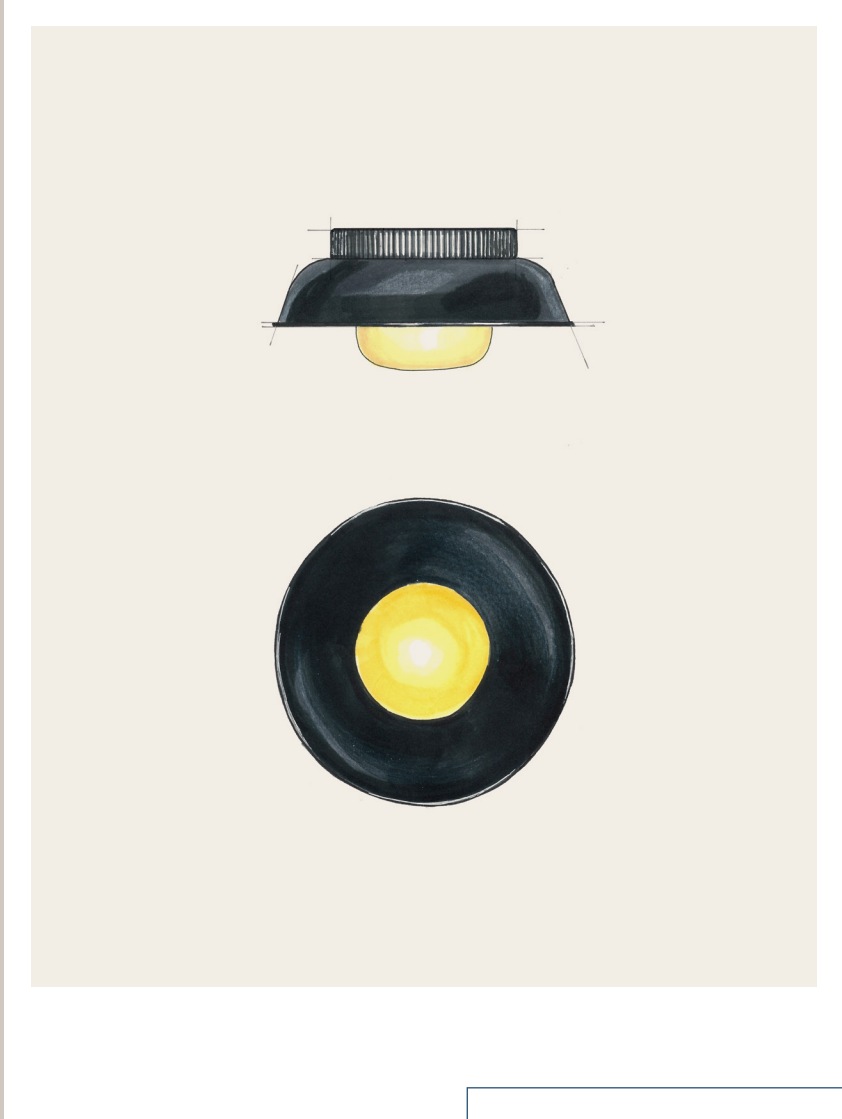

PRODUCT: Hoist Small

COLLECTION: HOIST

MANUFACTURER: RICH BRILLIANT WILLING

CURATED BY:
2020, N.Y.C.

William Gray

WG

©2020 WILLIAM GRAY INC.

Hoist Small

DESCRIPTION

The shaded members of the Hoist family take their cue from industrial light fixtures, with an added attention to form. The smallest version is an excellent choice for a small bathroom or spread across the ceiling of a covered outdoor space. Equally suited for indoor and outdoor use - as a sconce or flushmount - and available in custom powdercoat options.

DIMENSIONS & WEIGHT

Ø 8 × D 4 in / Ø 200 × D 100 mm
2 lb / 0.9 kg

SPECIFICATIONS

8.5W power consumption
581 lumens delivered

Lamping

1 x 8.5W LED
700 lumen source
min 80 CRI

LED Lifespan

50k hour


Available in 110-277V, 120V, or 220/240V input voltage
2200K, 2700K, 3000K or 3500K color temperature
Portfolio Dimming

MATERIAL

Cast glass diffuser, steel shade, aluminum module

FINISH

a. Cream White
b. Black
c. Blue
d. Vermilion

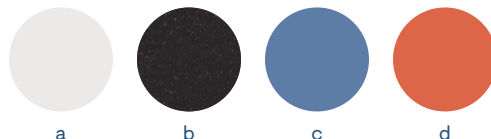

Hoist Specification Logic

Product ID specification logic

Model	Variant	Finish	CCT	Input	Control	Power	IP
-------	---------	--------	-----	-------	---------	-------	----

Model

Hoist						H	
Hoist sconce						HS	
Hoist pendant						HP	

Variant

21" shade large diffuser						21B	
14" shade large diffuser						14B	
8" shade small diffuser						08A	
no shade large diffuser						B	
no shade small diffuser						A	

Finish

Cream White						PC 24	
Matte Black						PC30	
Blue Gloss						PC36	
Vermilion						PC42	
custom powder coating						PCXX	
custom plated finish						PFX	

Color Temp

2200K (candlelight) ('-TR' control only)						22	
2700K (warm white)						27	
3000K (soft white) ('-TM' control only)						30	
3500K (neutral white) ('-TM' control only)						35	

Input Voltage

110-120V						120	
220-240V (only with Flex "-TM" control)						220	
110-277V*						277	

*Upon request. Compatible with Performance "-10" and "-DL" control.

Control

Standard TRIAC forward-phase (10-100% dimming)						TR	
Flex 0-10V analog* (1-100% dimming)						TM	
Flex TRIAC forward-phase* (1-100% dimming)						TM	
Flex ELV reverse-phase* (1-100% dimming)						TM	
Performance 0-10V analog* (0.1-100% dimming)						10	
Performance DALI digital* (0.1-100% dimming)						DL	

*Requires external power supply

Power / external power supply						DEX	
--------------------------------------	--	--	--	--	--	-----	--

IP Rating / IP 65						IP65	
--------------------------	--	--	--	--	--	------	--

Pendant Swag Kit

Optional swag kit allows for installation without overhead junction box.
SKU: HP-2-PX__

Plug in Cord

192 in / 4877 mm standard cord length available in white. Custom lengths available upon request.

Canopy

5 in / 127 mm canopy matched to shade finish comes standard with every order.

Hoist Small



Hoist Small




Hoist Small




Hoist Small

Front Elevation

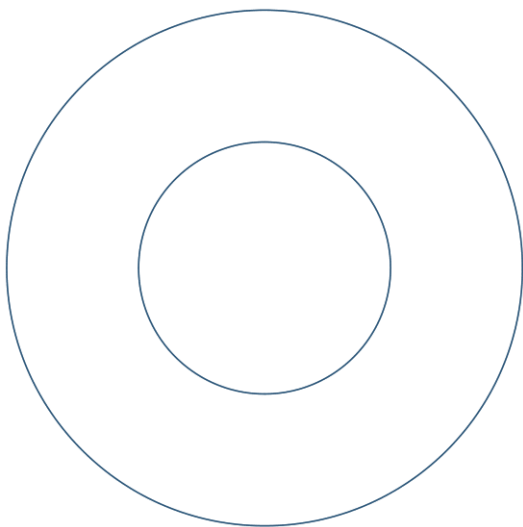

Ø 8 in

Side Elevation

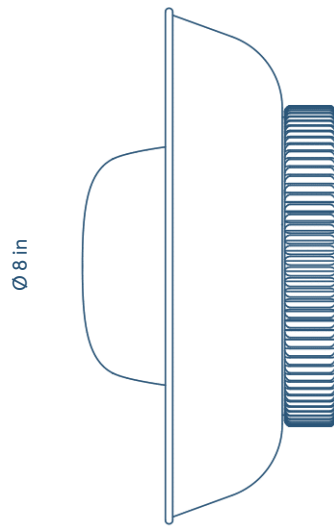

D 4 in