


WILLIAM GRAY

MRWILLIAMGRAY.COM @MRWILLIAMGRAY BY MEYER DAVIS

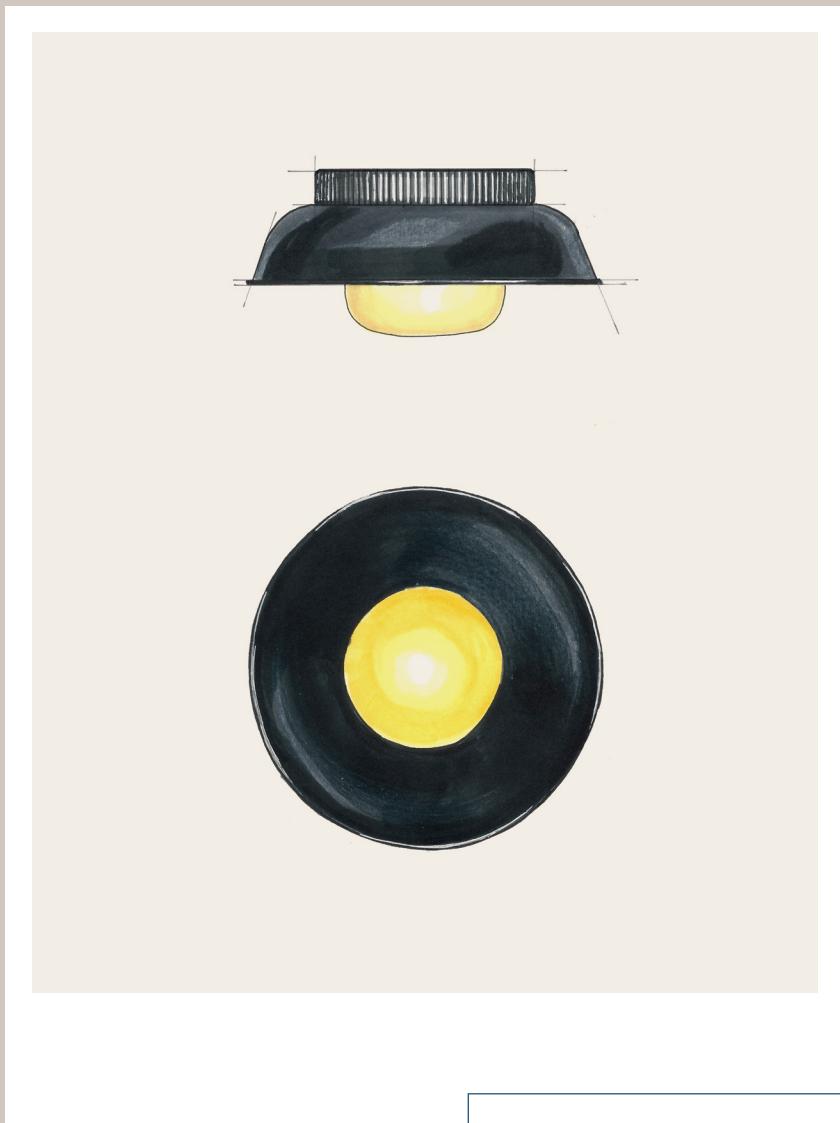

PRODUCT: Hoist Medium

COLLECTION: HOIST

MANUFACTURER: RICH BRILLIANT WILLING

CURATED BY:
2020, N.Y.C.

William Gray

WG

©2020 WILLIAM GRAY INC.

Hoist Medium

DESCRIPTION

The shaded members of the Hoist family take their cue from industrial light fixtures, with an added attention to form. The medium option works well stacked along a column or along a room's perimeter. Equally suited for indoor and outdoor use – as a sconce or flushmount – and available in custom powdercoat options.

DIMENSIONS & WEIGHT

Ø 14 × D 7 in / Ø 360 × D 180 mm
3.3 lb / 1.5 kg

SPECIFICATIONS

8.5W power consumption
655 lumens delivered

Lamping

1 x 8.5W LED
700 lumen source
min 80 CRI

LED Lifespan

50k hour


Available in 110-277V, 120V, or 220/240V input voltage
2200K, 2700K, 3000K or 3500K color temperature
Portfolio Dimming

MATERIAL

Cast glass diffuser, steel shade, aluminum module

FINISH

a. Cream White
b. Black
c. Blue
d. Vermilion

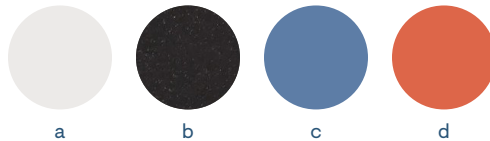

Hoist Specification Logic

Product ID specification logic

| Model | Variant | Finish | CCT | Input | Control | Power | IP |
|-------|---------|--------|-----|-------|---------|-------|----|
|-------|---------|--------|-----|-------|---------|-------|----|

Model

| | | | | | | | |
|---------------|--|--|--|--|--|----|--|
| Hoist | | | | | | H | |
| Hoist sconce | | | | | | HS | |
| Hoist pendant | | | | | | HP | |

Variant

| | | | | | | | |
|--------------------------|--|--|--|--|--|-----|--|
| 21" shade large diffuser | | | | | | 21B | |
| 14" shade large diffuser | | | | | | 14B | |
| 8" shade small diffuser | | | | | | 08A | |
| no shade large diffuser | | | | | | B | |
| no shade small diffuser | | | | | | A | |

Finish

| | | | | | | | |
|-----------------------|--|--|--|--|--|-------|--|
| Cream White | | | | | | PC 24 | |
| Matte Black | | | | | | PC30 | |
| Blue Gloss | | | | | | PC36 | |
| Vermilion | | | | | | PC42 | |
| custom powder coating | | | | | | PCXX | |
| custom plated finish | | | | | | PFX | |

Color Temp

| | | | | | | | |
|--|--|--|--|--|--|----|--|
| 2200K (candlelight) ('-TR' control only) | | | | | | 22 | |
| 2700K (warm white) | | | | | | 27 | |
| 3000K (soft white) ('-TM' control only) | | | | | | 30 | |
| 3500K (neutral white) ('-TM' control only) | | | | | | 35 | |

Input Voltage

| | | | | | | | |
|---|--|--|--|--|--|-----|--|
| 110-120V | | | | | | 120 | |
| 220-240V (only with Flex "-TM" control) | | | | | | 220 | |
| 110-277V* | | | | | | 277 | |

*Upon request. Compatible with Performance "-10" and "-DL" control.

Control

| | | | | | | | |
|--|--|--|--|--|--|----|--|
| Standard TRIAC forward-phase (10-100% dimming) | | | | | | TR | |
| Flex 0-10V analog* (1-100% dimming) | | | | | | TM | |
| Flex TRIAC forward-phase* (1-100% dimming) | | | | | | TM | |
| Flex ELV reverse-phase* (1-100% dimming) | | | | | | TM | |
| Performance 0-10V analog* (0.1-100% dimming) | | | | | | 10 | |
| Performance DALI digital* (0.1-100% dimming) | | | | | | DL | |

*Requires external power supply

| | | | | | | | |
|--------------------------------------|--|--|--|--|--|-----|--|
| Power / external power supply | | | | | | DEX | |
|--------------------------------------|--|--|--|--|--|-----|--|

| | | | | | | | |
|--------------------------|--|--|--|--|--|------|--|
| IP Rating / IP 65 | | | | | | IP65 | |
|--------------------------|--|--|--|--|--|------|--|

Pendant Swag Kit

Optional swag kit allows for installation without overhead junction box.

SKU: HP-2-PX_

Plug in Cord

192 in / 4877 mm standard cord length available in white. Custom lengths available upon request.

Canopy

5 in / 127 mm canopy matched to shade finish comes standard with every order.

Hoist Medium




Hoist Medium




Hoist Medium

Front Elevation

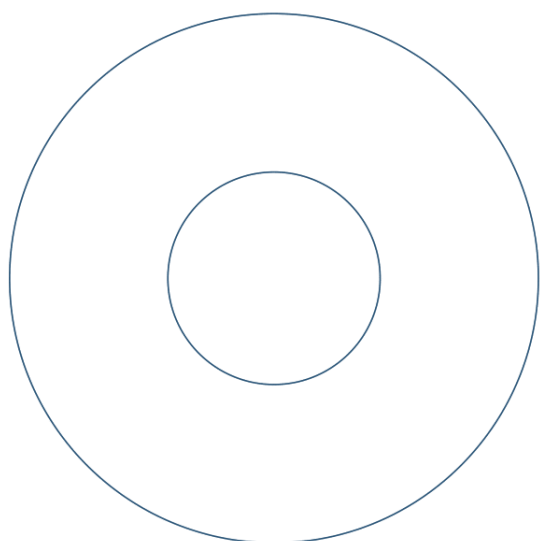

Ø 14 in

Side Elevation

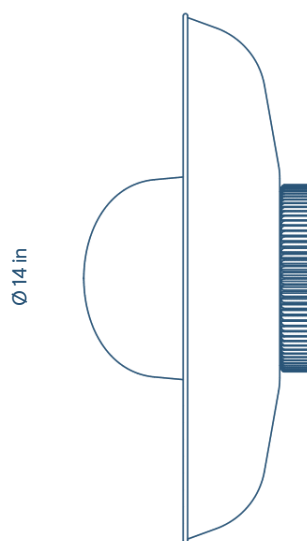

H 7 in